



FARROW FLOW HVLP PAINT INSERT

FF-1787-W


THE FIRST, THE FASTEST, THE FUTURE

Thank you for your purchase!

The Farrow Flow® insert for HVLP Paint guns is the only patented insert of its kind designed to spin the air in a vortex pattern inside of your airline before the tip to provide you with a wider paint pattern at the tip saving you time and paint while providing improved transfer efficiency.

Included in this Package:

- (a) ONE (1) Farrow Flow Insert for HVLP Wet Paint
- (b) TWO (2) Straight Connectors:
 - Standard 1/4" Swift Fit Universal Thread

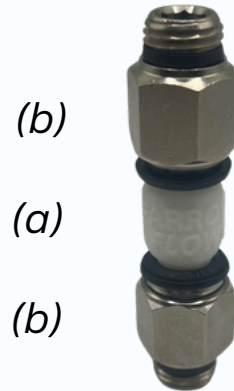

Installation Instructions

1	Turn off air supply to paint system.
2	Disconnect air line at the regulator.
3.	Insert the Farrow Flow insert by connecting male and female ends to the Farrow Flow.
4.	Reconnect air supply to paint gun air line.
5.	Before you begin painting, check to be sure air pressure is below 75psi in your air line to prevent damage to the insert.
6	Lower air pressure.
7	Paint as usual.
*	Tip 💡: Remember to lower pressure once inserted and adjust distance accordingly to get the full advantage of the FARROW FLOW insert.



FARROW FLOW, INC.
 Downingtown, PA 19335
 info@farrowflow.com
 www.farrowflow.com
 484-359-1900

Specifications

Length	101.5mm / 4in
Width	19.05mm / .75 in
Material	Thermoplastic Polyurethane (BPA and Styrene free)
Part#	FF-1787-W
Weight	16oz / 1lb
Straight Connectors <ul style="list-style-type: none"> • Standard 1/4" Swift Fit Universal Thread • SWIFTFIT fittings have been equipped with threads and an NBR thread seal that will universally connect to all thread types. 	Steel and Nylon

Safety Warning

- **Inserts are delivered factory assembled and ready for connection with a 1/4" connector.**
- *Prior to installation, check air pressure is below 75psi in your air line to prevent damage to the insert assembly.*
- *Do not exceed maximum 75 psi while Farrow Flow is inserted inline.*
- *Shut down air supply prior to any adjustment, connection installation or removal of the Farrow Flow insert assembly.*
- **TO CLEAN THE FARROW FLOW INSERT, USE MILD SOAP AND WATER ONLY!**
- *DO NOT use cleansing agents such as acetone, benzene, carbon tetrachloride, gasoline, toluene etc. which are damaging to the plastic.*
- *Do not use wrenches or pipe grips on the Farrow Flow as this could cause damage to the insert assembly.*



We value your trust in our product and welcome your feedback!